

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 June 2004 (17.06.2004)

PCT

(10) International Publication Number
WO 2004/051173 A2


- (51) International Patent Classification?: **F28F**
- (21) International Application Number:
PCT/KR2002/002266
- (22) International Filing Date: 2 December 2002 (02.12.2002)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): **LG ELECTRONICS INC.** [KR/KR]; 20, Yoido-Dong Yongdungpo-Ku, Yongdungpo-Ku, 150-010 Seoul (KR).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **LEE, Seong-Hwan** [KR/KR]; Woosong Apt., 102-1303 Namyang-Dong, 641-091 Changwon, Kyungsangnam-do (KR). **CHO, Min-Chul** [KR/KR]; 812-8, 2/3, Mandeok 1-Dong,

Buk-Ku, 616-830 Busan (KR). **SHIN, Soo-Yeon** [KR/KR]; Booyoung Apt. 1202-902 Wolsan maeul, Boogok-Li, Jangyu-Myeon, 621-833 Gimhae, Kyungsangnam-do (KR). **LEE, Sung-Hwa** [KR/KR]; Towol Sungwon Apt., 503-402, Sangnam-Dong, 641-781 Changwon, Kyungsangnam-do (KR).

- (74) Agent: **PARK, Jang-Won**; Jewoo Bldg. 5th Floor 200 Nonhyun-Dong, Kangnam-Ku, 135-010 Seoul (KR).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),

[Continued on next page]

(54) Title: HEAT EXCHANGER OF VENTILATING SYSTEM

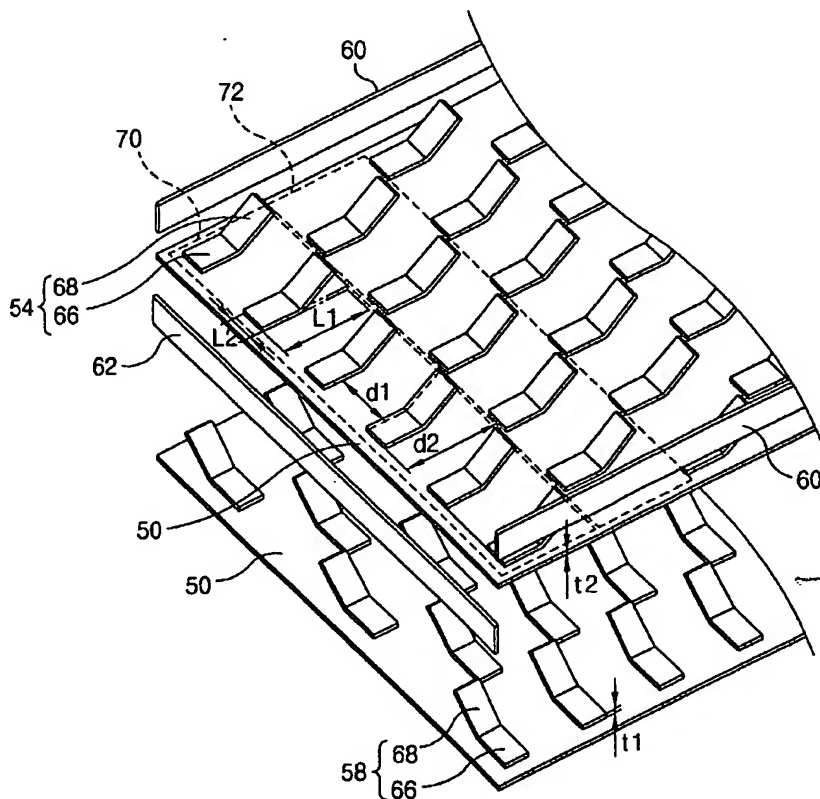

(57) Abstract: A heat exchanger of a ventilating system, including heat exchange plates which are laminated at a predetermined interval, first vibration members which are laminated among the heat exchange plates, for generating turbulence in outdoor air passing through a first air path, being aligned in the first air path through which the outdoor air passes and second vibration members for generating turbulence in the indoor air passing through a second air path, while being aligned in the second air path through which indoor air passes, can improve heat transfer performance by increasing turbulence of air by positioning a mesh type heat exchange in a air path through which outdoor and indoor air passes.



WO 2004/051173 A2